WAVEPOINT GROUP

hawo


hp 630 WS

L-Sealer for professional packaging

HP630WS





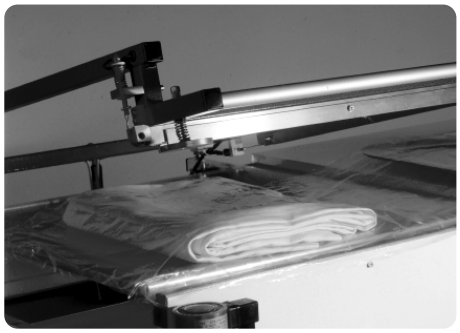

NO WARM-UP
Ready for immediate use – no heating time.

SEAL & CUT
Integrated cutting wire seals and trims in one step.

UP TO 60 x 60 CM
Adjustable table for packs from 15 x 15 cm.

All products shown may vary due to various options available.

HP 630 WS L-SEALER



The hawo hp 630 WS is a professional L-sealer, built for continuous use in laundries, dry cleaners and garment-handling operations. Items are placed into an open half-tube film, slid beneath the welding frame and sealed as the frame closes – the film is sealed and cut in a single step for a clean, secure closure every time.

Magnets hold the frame down automatically during sealing, keeping a constant contact pressure so results don't depend on the operator. When the cycle ends the frame opens by itself, and while the unit is sealing the operator can already prepare the next item on the integrated workspace – keeping output high.

With no warm-up time the machine is ready immediately. The height- and depth-adjustable table takes packs from approx. 15 x 15 cm up to 60 x 60 cm without changing the film roll, and the sealer works with all thermoplastic films – especially PE – as well as compostable and biodegradable materials such as ORGANIXtex.

MAIN FEATURES

- Simple, uncomplicated handling
- Infinitely variable sealing time
- Integrated cutting wire – no separate cutting
- Magnetic frame hold with constant pressure
- Frame opens automatically after sealing
- Controlled film consumption

APPLICATIONS

- Laundries and dry cleaners
- Clothing and textile industry
- Mail-order and e-commerce fulfilment
- Transport companies and airlines
- General industrial packaging

Available options (upon request): hp 630 WE preparatory suction module – limits welding fumes when connected to an extraction device.

Technical data	HP 630 WS
Machine type	Free-standing L-sealer
Welding length	630 x 630 mm
Packaging size	approx. 15 x 15 to 60 x 60 cm
Max. product height	300 mm
Power supply	230 V / 50 Hz
Power rating	500 VA
Welding method	Impulse separating seal
Sealing time	Electronic, infinitely variable
Heating time	None – ready immediately
Size adjustment	Height & depth adjustable table
Suitable films	All thermoplastics, esp. PE
Frame hold	Magnetic, opens automatically
Dimensions (W x D x H)	1600 x 1000 x 1000 mm

Due to constant research and development, some specifications may change from those printed.

+44 (020) 8579 2661 mail@wavepointgroup.co.uk www.wavepointgroup.co.uk